

OneSteel Recycling Hexham Quarterly Noise Monitoring Report_Q1 2017



NATA ACCREDITATION No. 2778 (14391)

Accredited for compliance with ISO/IEC 17025 – Testing

The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards

This document may not be reproduced except in full.

OneSteel Recycling Hexham Quarterly Noise Monitoring Report_Q1 2017

Client: OneSteel Recycling Pty Ltd

ABN: 28002707262

Prepared by

AECOM Australia Pty Ltd

17 Warabrook Boulevard, Warabrook NSW 2304, PO Box 73, Hunter Region MC NSW 2310, Australia

T +61 2 4911 4900 F +61 2 4911 4999 www.aecom.com

ABN 20 093 846 925

12-Apr-2017

Job No.: 60493017

AECOM in Australia and New Zealand is certified to ISO9001, ISO14001 AS/NZS4801 and OHSAS18001.

© AECOM Australia Pty Ltd (AECOM). All rights reserved.

AECOM has prepared this document for the sole use of the Client and for a specific purpose, each as expressly stated in the document. No other party should rely on this document without the prior written consent of AECOM. AECOM undertakes no duty, nor accepts any responsibility, to any third party who may rely upon or use this document. This document has been prepared based on the Client's description of its requirements and AECOM's experience, having regard to assumptions that AECOM can reasonably be expected to make in accordance with sound professional principles. AECOM may also have relied upon information provided by the Client and other third parties to prepare this document, some of which may not have been verified. Subject to the above conditions, this document may be transmitted, reproduced or disseminated only in its entirety.

Quality Information

Document OneSteel Recycling Hexham Quarterly Noise Monitoring Report_Q1 2017

Ref 60493017


Date 12-Apr-2017

Prepared by Farshid Deilamy

Reviewed by Chad Whitburn

Approved Signatory  _____

Revision History

Rev	Revision Date	Details	Authorised	
			Name/Position	Signature
0	12-April-2017	Final Report	Chad Whitburn Air Quality Team Leader	

This page has been left blank
intentionally.

Table of Contents

1.0	Introduction	1
1.1	Background	1
1.2	Site and Monitoring Locations	1
1.3	Methodology	1
2.0	Noise Limits	5
2.1	EPL Conditions	5
2.2	NSW Industrial Noise Policy	5
3.0	Attended Monitoring	7
3.1	Attended Monitoring	7
	3.1.1 Instrumentation	7
	3.1.2 Weather Conditions	7
	3.1.3 Site Operations	7
	3.1.4 Results	7
	3.2 On-Site Boundary Noise Measurements	9
4.0	Conclusion	11
Appendix A		
	Glossary of Acoustic Terms	A

List of Tables

Table 1	EPL Condition L4 – Noise Limits	5
Table 2	March 2017 - Attended Noise Monitoring Results Summary, dB(A)	8
Table 3	March 2017 – On-Site Boundary Measurement Results	10
Table 4	Predicted Noise Levels at the Receptors	10

List of Figures

Figure 1	OneSteel Site and Receiver Locations	3
Figure 2	On-Site Measurement Locations	9

This page has been left blank
intentionally.

1.0 Introduction

1.1 Background

OneSteel Recycling Hexham (the site) has engaged AECOM Australia Pty Ltd to conduct noise monitoring at the location of the nearest residential receivers from the Hexham recycling plant. The noise survey was conducted on Shamrock Street and St. Joseph's Retirement Community on 21 March 2017 as stated in OneSteel Hexham's environment protection licence (EPL) No: 5345.

Acoustic terminology used in this report is defined in **Appendix A**.

1.2 Site and Monitoring Locations

The site is located at 107 Sparke Street, Hexham, NSW. The site is bounded by vacant land and the Hunter River to the north and east, with Maitland Road located between the site and the river. To the south is Ironbark Creek with the Hunter Rail line to the west.

Site noise is generally characterised as heavy vehicle traffic due to delivery trucks visiting the site as well as the industrial shredder and associated site operations (handling scrap metal, heavy machinery etc.)

The site is open from 6:00 am to 6:00 pm from Monday to Saturday, however delivery trucks and the mill area (which contains the shredder operations) operate between 7:00 am and 6:00 pm Monday to Saturday, in accordance with EPL condition L5.1. The site does not operate on Sunday.

The two EPL monitoring locations are:

- R1 – Empty lot at 15 Shamrock Street, Hexham; and
- R2 – Calvary St Joseph's Retirement Community - 240 Maitland Rd, Sandgate

These EPL locations were selected as the nearest residential receptors to the north and south of the site. The monitoring locations are shown in **Figure 1**. The monitoring for the first quarter 2017 was conducted on 21 March 2017 at these two locations, with results detailed in **Table 2**.

1.3 Methodology

Attended measurements were conducted using a Larson Davis SoundTrack LxT. This instrument has Class 1 characteristics as defined in AS IEC 61672.1-2004 "Electroacoustics - Sound Level Meters". Measurements were conducted over 15-minute intervals.

The influence of extraneous noise, i.e. road and rail traffic, makes it difficult to determine the noise contribution from the site in isolation, and therefore difficult to determine compliance with EPL limits.

Where direct measurement of noise contribution from an industrial facility is not possible due to persistent extraneous noise sources, the Environment Protection Authority's NSW Industrial Noise Policy (INP) makes an allowance for assessment by other methods.

Section 11.1.2 Notes on noise monitoring of the INP states:

Where existing noise levels are high.

When compliance is being measured it may be found that, in many cases, existing noise levels are higher than noise level from the source, making it difficult to separate out the source noise level. When this happens, it may not be feasible to measure compliance at the specified location, and other methods will be needed. In these cases, measurements may be taken closer to the source and then calculated back to the specified location. In doing this, take care to account for the 'near field', a region in which sound pressure levels do not decrease with distance in the normal way. Definitions of the extent of this region are contained in many noise textbooks (for example, Bies and Hanson 1996). Any calculations should be done in accordance with the validation requirements set out in Section 6.2.


Section 6.2 goes on to discuss assessment of large sites through the use of a computer noise model.

One of the notes attached to Table 4 in the project approval conditions of the INP states;

'noise generated by the project is to be measured in accordance with the relevant procedures and exemptions (including certain meteorological conditions) of the INP'.

Determining compliance by prediction is therefore deemed to be appropriate in this instance.

Figure 1 OneSteel Site and Receiver Locations

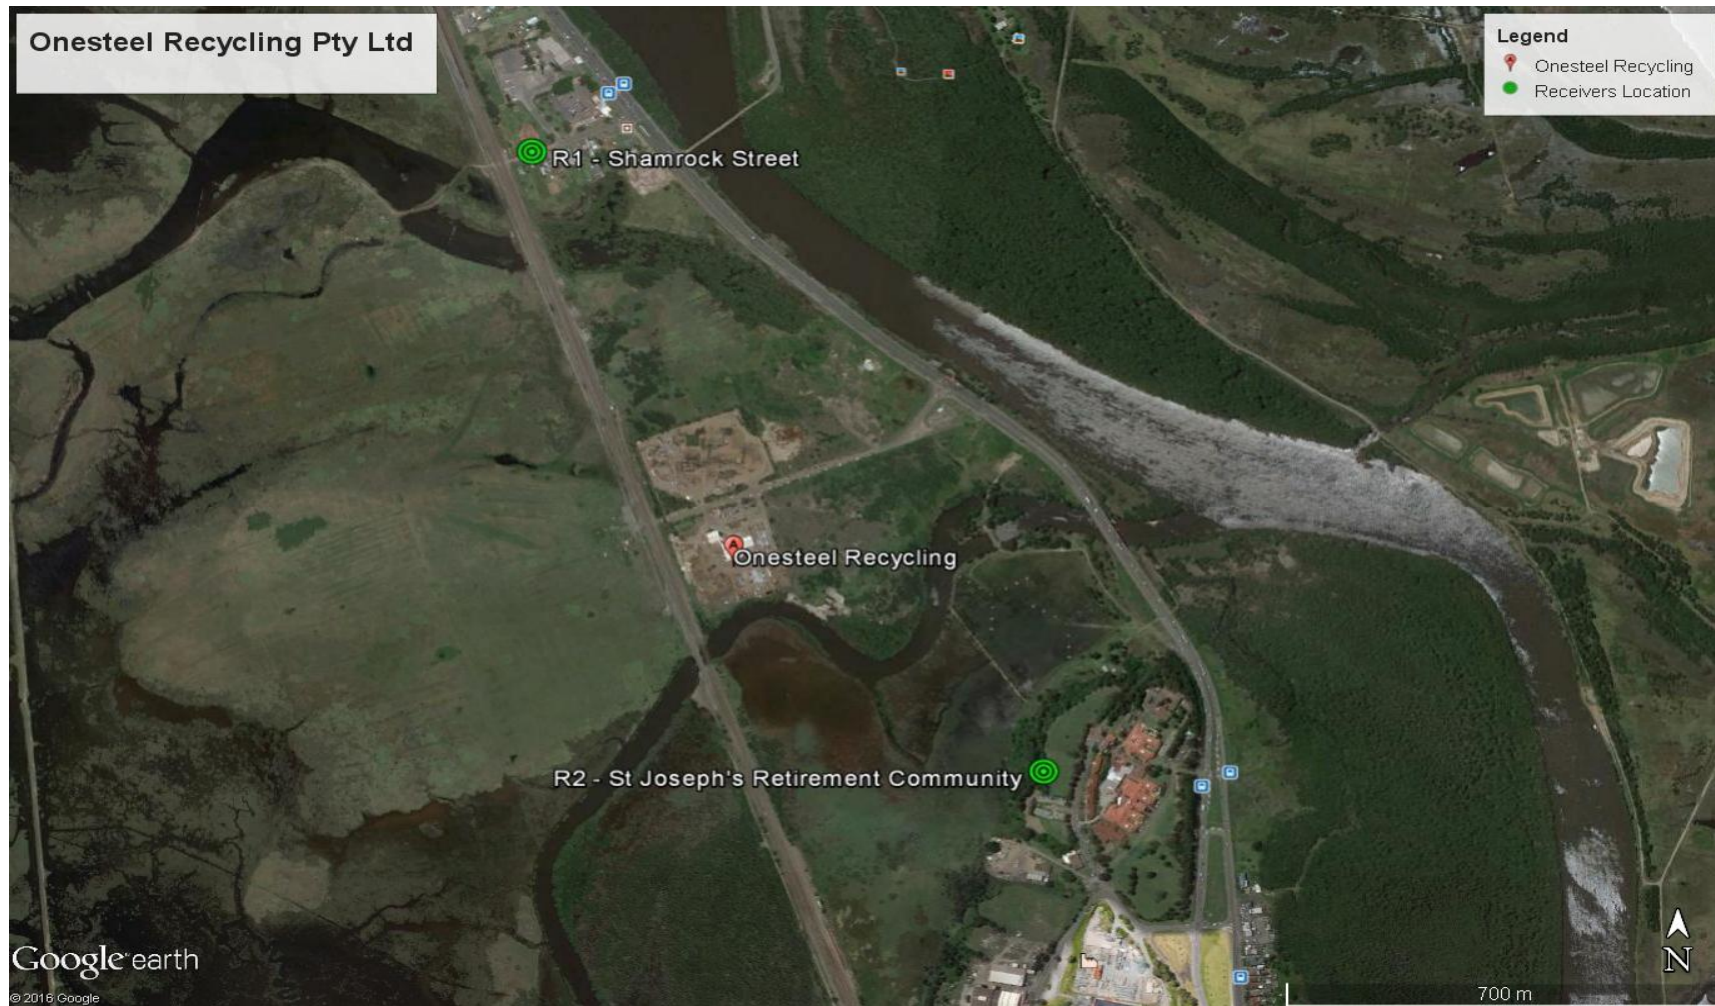

This page has been left blank intentionally.

2.0 Noise Limits

2.1 EPL Conditions

EPL Condition L4 – Noise Limits are reproduced below:

Table 1 EPL Condition L4 – Noise Limits

L4.1 Noise from the premises must not exceed the limits specified in the table below:

Location	Noise Limit dB(A)			
	Day	Evening	Night	
	L _{Aeq} (15min)	L _{Aeq} (15min)	L _{Aeq} (15min)	L _{A1} (1min)
Any residence in Shamrock Street, Hexham, affected by noise from the premises	47	48	45	55
St Joseph's Retirement Community and any associated residence in Old Maitland Road, Hexham, affected by noise from the premises	53	42	41	56
Any operating industrial premises affected by noise from the premises	70	70	70	N/A

L4.2 The noise limits above comply when measured or computed at any point within one metre of the boundary of any affected residential premises.

L4.3 5dB(A) must be added to the measured level if the noise is substantially tonal or impulsive in character.

L4.4 Day is defined as the period from 7am to 6pm Monday to Saturday and 8am to 6pm Sundays and Public Holidays.

Evening is defined as the period from 6pm to 10pm.

Night is defined as the period from 10pm to 7am Monday to Saturday and 10pm to 8am Sundays and Public Holidays.

L4.5 The noise emission limits identified in Condition L4.1 apply under the following meteorological conditions;

- a) Wind speeds up to 3m/s at 10 metres above ground level; and*
- b) Temperature inversion conditions of up to 3°C/100m.*

2.2 NSW Industrial Noise Policy

In reference to determining compliance with noise conditions, the Industrial Noise Policy (INP) states the following:

11.1.3 Non-compliance with noise conditions

When is a development in non-compliance with a noise condition?

A development will be deemed to be in non-compliance with a noise consent or licence condition if the monitored noise level is more than 2 dB above the statutory noise limit specified in the consent or licence condition. This may occur for two reasons:

- The noise from the development is excessive, in which case the development is truly not complying with its consent or licence condition.*

- *The noise was increased by extreme, non-standard weather effects - in which case the development is not considered to be in non-compliance with its consent or licence condition. Non-standard weather effects can be considered to be present during monitoring if the cloud cover is less than 40 per cent and the wind speed (at 10 m height) is less than 1.0 m/s (represents an extremely adverse weather condition for noise) - during the period from 6 pm to 7 am in non-arid areas (see Section 9.2).*

In this latter case, further monitoring at a later date is required to determine compliance under the meteorological conditions specified in the consent/licence condition.

3.0 Attended Monitoring

3.1 Attended Monitoring

Attended measurements were conducted on 21 March 2017 at the two monitoring locations listed in **Section 1.2** during the daytime (0700 – 1800), evening (1800 – 2200) and night time (2200 - 0700). Measurements were conducted at a height of 1.5m.

3.1.1 Instrumentation

Attended measurements were conducted using a Larson Davis SoundTrack LxT. This instrument has Class 1 characteristics as defined in AS IEC 61672.1-2004 “Electroacoustics - Sound Level Meters”. Measurements were conducted over 15-minute intervals.

Calibration of the instrument was confirmed with a Larson Davis CAL150 Sound Level Calibrator prior to, and at the completion of monitoring with a drift in calibration not exceeding ± 0.5 dB.

All equipment used for this assessment has current calibration certificates (i.e. calibrated in the last two years).

The sound level meter was set to ‘fast’ time weighting and programmed to store $L_{10(15 \text{ min})}$, $L_{Aeq(15 \text{ min})}$ and $L_{A90(15 \text{ min})}$ noise levels during each measurement period.

3.1.2 Weather Conditions

Weather conditions were within acceptable limits for noise monitoring during 21 March 2017. Skies were clear on the day and winds were calm.

3.1.3 Site Operations

On the days of measurements the OneSteel Recycling facility was operating under normal conditions. Noise emission characteristics of the site are outlined in **Section 1.2**.

3.1.4 Results

Noise monitoring was conducted during the daytime, evening and night time periods, when the main noise sources on site were operational.

The results from the attended noise monitoring carried out on 21 March 2017 during those periods are presented in **Table 2**. Results of calculated noise based on boundary measurements are presented in **Section 3.2**.

Table 2 March 2017 - Attended Noise Monitoring Results Summary, dB(A)

Location	Date / Time	EPL limits $L_{Aeq(15mins)}$ dB(A)	Measured Noise Level, dB(A)		Description of Noise Environment
			$L_{Aeq(15 min)}$	$L_{A90(15 min)}$	
Day 7:00 am – 18:00 pm					
R1 – 15 Shamrock Street, Hexham	21/03/17 14:32	47	54	48	Noise from site inaudible Other noise sources include: <ul style="list-style-type: none"> Freight and passenger trains noise; Heavy trucks; and Traffic on Maitland Road.
R2 – Calvary St Joseph's Retirement Community	21/03/17 14:57	53	50	45	Noise from site barely audible Other noise sources include: <ul style="list-style-type: none"> Birds and crickets; Traffic on Maitland Road; and Freight train.
Evening 18:00 pm – 22:00 pm					
R1 – 15 Shamrock Street, Hexham	21/03/17 21:13	48	50	48	Noise from site inaudible Other noise sources include: <ul style="list-style-type: none"> Heavy trucks; Freight and passenger trains; and Traffic on Maitland Road.
R2 – Calvary St Joseph's Retirement Community	21/03/17 21:43	42	47	45	Noise from site barely audible Other noise sources include: <ul style="list-style-type: none"> Birds and crickets; and Freight train.
Night 22:00 pm – 7:00 am					
R1 – 15 Shamrock Street, Hexham	21/03/17 23:39	45	49	45	Noise from site inaudible Other noise sources include: <ul style="list-style-type: none"> Freight and passenger trains; Heavy trucks; and Traffic on Maitland Road.
R2 – Calvary St Joseph's Retirement Community	21/03/17 22:06	41	46	45	Noise from site inaudible Other noise sources include: <ul style="list-style-type: none"> Crickets and background noise.

The results in **Table 2** show that the measured $L_{Aeq(15 min)}$ noise level at R2 – Calvary St Joseph's Retirement Community is compliant with development EPL noise limits during the day-time period. Measured $L_{Aeq(15 min)}$ levels at this location and R1 – 15 Shamrock Street exceeded EPL criterion for all other periods, however it was noted that noise from OneSteel Recycling was inaudible or barely audible over ambient noise and the dominant noise was the road and train traffic at these locations.

3.2 On-Site Boundary Noise Measurements

Attended measurements were conducted on the 21 March 2017 along the boundary of the site during day, evening and night shifts in order to quantify site noise emissions and predict noise levels at each assessment location in the absence of extraneous noise. Attended noise monitoring was conducted at the northwest and southeast boundaries of the site as shown in **Figure 2**, which allowed closest access to noisy operations such as truck and excavator movements and the shredder operation. Measurements were conducted during daytime operation of the site, with trucks, excavators and the shredder operating on site along with monitoring of noise levels during evening and night times. These operations have conservatively been assumed to occur throughout the daytime and evening period.

In order to predict resultant noise levels at each receiver from the OneSteel facility alone, a 'flat ground' model was used based on hemispherical spreading, conservatively assuming no topographical shielding, ground or air absorption, directivity or meteorological effects. Site boundary measurement locations are shown on **Figure 2**. Results from on-site monitoring are presented in **Table 3**. Predicted noise levels at each assessment location are presented in **Table 4**.

Table 4.

Figure 2 On-Site Measurement Locations



Table 3 March 2017 – On-Site Boundary Measurement Results

Location	Boundary Monitoring location	Time	Duration	Measured noise level, L _{Aeq(15 min)} and L _{A90(15 min)} dB(A)		Site Operation	
				L _{Aeq(15 min)}	L _{A90(15 min)}		
Northwest boundary of site	A	Day	14:01	15 mins	67	65	Normal operations, trucks, excavators and shredder operating
		Evening	20:48	15 mins	50	46	Mill Maintenance
		Night	23:12	15 mins	45	42	Not operational
Southeast boundary of site	B	Day	13:29	15 mins	59	53	Normal operations, trucks, excavators and shredder operating
		Evening	20:22	15 mins	47	45	Mill Maintenance
		Night	22:33	15 mins	46	44	Not operational

Table 4 Predicted Noise Levels at the Receptors

Receptor Location	Time	Predicted noise impact, dB(A)	EPL noise limit, dB(A)			Comply
			Day	Evening	Night	
R1 – 15 Shamrock Street, Hexham	Day	14:01	48	47		Yes ¹
	Evening	20:48	31		48	Yes
	Night	23:12	27			45
R2 – Calvary St Joseph's Retirement Community	Day	13:29	49	53		Yes
	Evening	20:22	37		42	Yes
	Night	22:33	36			41

Notes:

1. A predicted noise impact is deemed to comply with EPL conditions if the predicted noise level is within 2 dB of EPL noise limit, as discussed in Section 2.2.

Results show no non-compliances with EPL conditions are predicted at either receiver location.

4.0 Conclusion

Attended noise compliance monitoring at designated noise sensitive receivers has taken place in accordance with the requirements of OneSteel Hexham EPL (EPL 5345).

$L_{Aeq(15\text{ min})}$ noise levels higher than the project EPL noise limits were measured at the majority of the designated receivers during the daytime, evening and night time periods. $L_{Aeq(15\text{ min})}$ noise level measured at R2 – Calvary St Joseph's Retirement Community was compliant with EPL noise limits during the day-time period. However it was noted that extraneous noise sources, namely road and rail traffic, contributed significantly to these noise levels.

Site noise from OneSteel recycling was indiscernible at Shamrock Street during the day, evening and night; however it was faintly audible at St Joseph's retirement Community during day and evening due to proximity to the site and site activity during the day. $L_{Aeq(15\text{ min})}$ levels were largely influenced by extraneous noise sources such as train and road traffic at both locations, whereas $L_{A90(15\text{ min})}$ levels were influenced by traffic on nearby roads. Definitive compliance with EPL noise limits was, however, difficult to determine through direct measurement due to the influence of extraneous noise sources during the day, evening and night time.

Due to the difficulty in determining the contribution of the facility at the nominated receiver locations, an alternative method of determining compliance, in accordance with the INP was considered appropriate. In this case site boundary measurements were used to predict noise impacts at each assessment location.

As shown in

Table 4, Predicted noise levels indicate compliance with the EPA noise limits at all receiver locations, demonstrating compliance with EPL conditions.

This page has been left blank
intentionally.



Appendix A

Glossary of Acoustic Terms

Appendix A Glossary of Acoustic Terms

The following is a brief description of acoustic terminology used in this report:

<i>Sound power level</i>	The total sound emitted by a source																						
<i>Sound pressure level</i>	The amount of sound at a specified point																						
<i>Decibel [dB]</i>	The measurement unit of sound																						
<i>A Weighted decibels [dB(A)]</i>	The A weighting is a frequency filter applied to measured noise levels to represent how humans hear sounds. The A-weighting filter emphasises frequencies in the speech range (between 1kHz and 4 kHz) which the human ear is most sensitive to, and places less emphasis on low frequencies at which the human ear is not so sensitive. When an overall sound level is A-weighted it is expressed in units of dB (A).																						
	The decibel scale is logarithmic in order to produce a better representation of the response of the human ear. A 3 dB increase in the sound pressure level corresponds to a doubling in the sound energy. A 10 dB increase in the sound pressure level corresponds to a perceived doubling in volume. Examples of decibel levels of common sounds are as follows:																						
<i>Decibel scale</i>	<table> <tr> <td>0dB(A)</td> <td>Threshold of human hearing</td> </tr> <tr> <td>30dB(A)</td> <td>A quiet country park</td> </tr> <tr> <td>40dB(A)</td> <td>Whisper in a library</td> </tr> <tr> <td>50dB(A)</td> <td>Open office space</td> </tr> <tr> <td>70dB(A)</td> <td>Inside a car on a freeway</td> </tr> <tr> <td>80dB(A)</td> <td>Outboard motor</td> </tr> <tr> <td>90dB(A)</td> <td>Heavy truck pass-by</td> </tr> <tr> <td>100dB(A)</td> <td>Jackhammer/Subway train</td> </tr> <tr> <td>110 dB(A)</td> <td>Rock Concert</td> </tr> <tr> <td>115dB(A)</td> <td>Limit of sound permitted in industry</td> </tr> <tr> <td>120dB(A)</td> <td>747 take off at 250 metres</td> </tr> </table>	0dB(A)	Threshold of human hearing	30dB(A)	A quiet country park	40dB(A)	Whisper in a library	50dB(A)	Open office space	70dB(A)	Inside a car on a freeway	80dB(A)	Outboard motor	90dB(A)	Heavy truck pass-by	100dB(A)	Jackhammer/Subway train	110 dB(A)	Rock Concert	115dB(A)	Limit of sound permitted in industry	120dB(A)	747 take off at 250 metres
0dB(A)	Threshold of human hearing																						
30dB(A)	A quiet country park																						
40dB(A)	Whisper in a library																						
50dB(A)	Open office space																						
70dB(A)	Inside a car on a freeway																						
80dB(A)	Outboard motor																						
90dB(A)	Heavy truck pass-by																						
100dB(A)	Jackhammer/Subway train																						
110 dB(A)	Rock Concert																						
115dB(A)	Limit of sound permitted in industry																						
120dB(A)	747 take off at 250 metres																						
<i>Frequency [f]</i>	The repetition rate of the cycle measured in Hertz (Hz). The frequency corresponds to the pitch of the sound. A high frequency corresponds to a high pitched sound and a low frequency to a low pitched sound.																						
<i>Equivalent continuous sound level [L_{Aeq}]</i>	The constant sound level which, when occurring over the same period of time, would result in the receiver experiencing the same amount of sound energy.																						
L_{max}	The maximum sound pressure level measured over the measurement period																						
L_{min}	The minimum sound pressure level measured over the measurement period																						
L_{10}	The sound pressure level exceeded for 10% of the measurement period. For 10% of the measurement period it was louder than the L_{10} .																						

<i>L_{A90(15 min)}</i>	The sound pressure level exceeded for 90% of the measurement period. For 90% of the measurement period it was louder than the L _{A90 (15 min)} .
<i>Ambient noise</i>	The all-encompassing noise at a point composed of sound from all sources near and far.
<i>Background noise</i>	The underlying level of noise present in the ambient noise when extraneous noise (such as transient traffic and dogs barking) is removed. The L _{A90 (15 min)} sound pressure level is used to quantify background noise.
<i>Traffic noise</i>	The total noise resulting from road traffic. The L _{eq} sound pressure level is used to quantify traffic noise.
<i>Day</i>	The period from 0700 to 1800 h Monday to Saturday and 0800 to 1800 h Sundays and Public Holidays.
<i>Evening</i>	The period from 1800 to 2200 h Monday to Sunday and Public Holidays.
<i>Night</i>	The period from 2200 to 0700 h Monday to Saturday and 2200 to 0800 h Sundays and Public Holidays.
<i>Assessment background level [ABL]</i>	The overall background level for each day, evening and night period for each day of the noise monitoring.
<i>Rating background level [RBL]</i>	The overall background level for each day, evening and night period for the entire length of noise monitoring.

*Definitions of a number of terms have been adapted from Australian Standard AS1633:1985 "Acoustics – Glossary of terms and related symbols", the EPA's NSW Industrial Noise Policy and the EPA's NSW Road Noise Policy.

